


AS334 25m (82') Width, 4.0m Leg Standard Structure

Also Available in 5.4m Leg



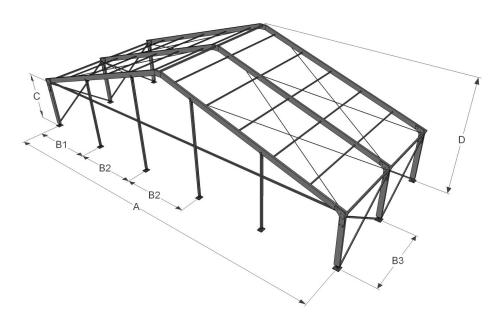

Dimensions and Technical Specifications

All Dimensions On Center

25.20m	82.69ft
5.10m	16.76ft
5.00m	16.40ft
5.00m	16.40ft
3.83m	12.55ft
7.90m	25.92ft
	5.10m 5.00m 5.00m 3.83m

For 5.4m Leg, Add 4.59ft (1.4m) to Eave & Ridge Heights

Compatible with Glasswall or Hardwall Systems

Roof Slope 18 degrees

Extruded Aluminum Parts

Hollow, Tracked Profile Shown Above 6005A-T5 and 6061-T6 Aluminum Clear Anodized 204-R1 Finish

Steel Parts

A36 Structural Steel
A656 for Leg Reinforcement Plates
Hot-Dip Galvanized for Corrosion Resistance

AS334 X-Bracing

Two 5m Bays Containing X-Bracing and Rafter Cables Can be Followed with Up To Four Open 5m Bays Without X-Braces or Cables

Available Exclusively From:



^{*}Technical specifications may change at any time without notice. ©2012 Eventec